



A flexible and comfortable jack of all trades

- A new 4-Cylinder Kubota engine without catalyst (DOC) and particulate filter (DPF) ensures powerful performance;
- Standard double acting hydraulic function (mechanically operated) can easily be expanded with additional functions and a dual gear pump;
- The G2200 HD and HD+-models come standard with a 2-speed gearbox and heavy duty axles for higher pulling force and higher top speed
- Choose the standard version for a higher lifting height, and the X-TRA for a higher tipping load;



G2200

G2200 X-TRA

G2200 HD

G2200 X-TRA HD

G2200 HD+

G2200 X-TRA HD+



	G2200	G2200 X-TRA	G2200 HD	G2200 X-TRA HD	G2200 HD+	G2200 X-TRA HD+
Engine	26 hp (Kubota)	26 hp (Kubota)	26 hp (Kubota)	26 hp (Kubota)	26 hp (Kubota)	26 hp (Kubota)
Service weight	4,630 lbs.	4,850 lbs.	4,630 lbs.	4,850 lbs.	4,630 lbs.	4,850 lbs.
Lifting height	111.2 in.	96.5 in.	111.2 in.	96.5 in.	111.2 in.	96.5 in.
Tipping load	3,197 lbs.	4,528 lbs.	3,197 lbs.	4,528 lbs.	3,197 lbs.	4,528 lbs.
Working hydraulics	11.9 GPM	11.9 GPM	11.9 GPM	11.9 GPM	11.9 GPM	11.9 GPM
Pulling force	12,600 N	12,600 N	14,300 N	14,300 N	23,000 N	23,000 N
Max. speed	7.5 mp/h	7.5 mp/h	12.4 mp/h	12.4 mp/h	12.4 mp/h	12.4 mp/h



TECHNICAL SPECIFICATIONS

Dimensions

	G2200	G2200 X-TRA	G2200 HD	G2200 X-TRA HD	G2200 HD+	G2200 X-TRA HD+
A	59.6 in.	62.2 in.	59.6 in.	62.2 in.	59.6 in.	62.2 in.
B	117.1 in.	120.2 in.	117.1 in.	120.2 in.	117.1 in.	120.2 in.
C	145.3 in.	150.8 in.	145.3 in.	150.8 in.	145.3 in.	150.8 in.
D	24.5 in.	24.5 in.	24.5 in.	24.5 in.	24.5 in.	24.5 in.
E	5.3 in.	5.3 in.	5.3 in.	5.3 in.	5.3 in.	5.3 in.
F	31.4 in.	31.4 in.	31.4 in.	31.4 in.	31.4 in.	31.4 in.
G	49.4 in.	49.4 in.	49.4 in.	49.4 in.	49.4 in.	49.4 in.
H	90.6 in.	90.6 in.	90.6 in.	90.6 in.	90.6 in.	90.6 in.
I	89.9 in.	89.9 in.	89.9 in.	89.9 in.	89.9 in.	89.9 in.
J	58.3 in.	49.2 in.	58.3 in.	49.2 in.	58.3 in.	49.2 in.
K	78.3 in.	66.1 in.	78.3 in.	66.1 in.	78.3 in.	66.1 in.
L	111.2 in.	96.5 in.	111.2 in.	96.5 in.	111.2 in.	96.5 in.
M	133.5 in.	119.7 in.	133.5 in.	119.7 in.	133.5 in.	119.7 in.
N	43°	41°	43°	41°	43°	41°
O	53°	46°	53°	46°	53°	46°
P	47°	37°	47°	37°	47°	37°
Q	29°	29°	29°	29°	29°	29°
R	Ø 29.9 in.	Ø 29.9 in.	Ø 29.9 in.	Ø 29.9 in.	Ø 29.9 in.	Ø 29.9 in.
1A	102.3 in.	104.3 in.	102.3 in.	104.3 in.	102.3 in.	104.3 in.
1B	90.2 in.	92.2 in.	90.2 in.	92.2 in.	90.2 in.	92.2 in.
1C	46.4 in.	48.4 in.	46.4 in.	48.4 in.	46.4 in.	48.4 in.
1D	42.5 in.	42.5 in.	42.5 in.	42.5 in.	42.5 in.	42.5 in.

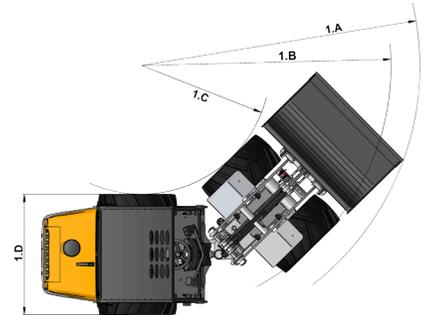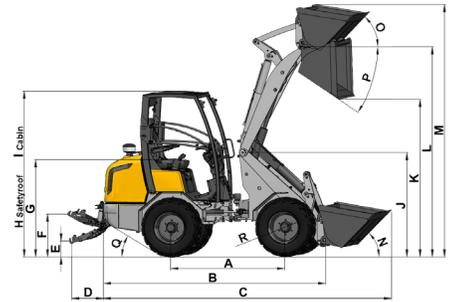

Tipping loads

	G2200	G2200 X-TRA	G2200 HD	G2200 X-TRA HD	G2200 HD+	G2200 X-TRA HD+
S	3,197 lbs	4,528 lbs	3,197 lbs	4,528 lbs	3,197 lbs	4,528 lbs
T	2,756 lbs	3,483 lbs	2,756 lbs	3,483 lbs	2,756 lbs	3,483 lbs
U	2,094 lbs	2,513 lbs	2,094 lbs	2,513 lbs	2,094 lbs	2,513 lbs
V	1,642 lbs	1,874 lbs	1,642 lbs	1,874 lbs	1,642 lbs	1,874 lbs
W	4,409 lbs	5,897 lbs	4,409 lbs	5,897 lbs	4,409 lbs	5,897 lbs
X	2,800 lbs	3,505 lbs	2,800 lbs	3,505 lbs	2,800 lbs	3,505 lbs
Y	2,205 lbs	2,469 lbs	2,205 lbs	2,469 lbs	2,205 lbs	2,469 lbs



TOBROCO-GIANT reserves the right to make changes in specifications at any time without notice or obligation.



GIANT[®]
BY TOBROCO

TOBROCO-GIANT USA
725 Ida Street, Cedar Falls
IA 50613, USA
Tel.: +1 319-449-3677
Fax.: +1 319-449-3738

Internet: www.tobroco-giant.us
E-Mail: info@tobroco-giant.us