




GiANT[®]
BY TOBROCO

G5000 SERIES

SPECIFICATIONS



MODEL	G5000	G5000 X-Tra	G5000 TELE
ENGINE	74 hp	74 hp	74 hp
SERVICE WEIGHT	9,920 lbs	9,700 lbs	10,140 lbs
LIFTING HEIGHT	137.8 in.	112.2 in.	171.3 in.
TIPPING LOAD	7,360 lbs	9,850 lbs	See Table
WORKING HYDRAULICS	21.1/35.7(opt.) GPM	21.1/35.7(opt.) GPM	21.1/35.7(opt.) GPM
MAX. SPEED	6.2/12.4/21.6(opt.) mph	6.2/12.4/21.6(opt.) mph	6.2/12.4/21.6(opt.) mph



Less tire wear and ground damage



Enhanced operator comfort through articulation and oscillation



Higher travel speeds



Low noise levels



Higher lift heights and higher tipping loads compared to service weight





The GiANT G5000 articulating wheel loader is powered by a Kubota 75 HP, 4-cylinder, turbo diesel engine. A diesel oxidation catalyst (DOC) and diesel particulate filter (DPF) aid the engine to achieve Stage V emission compliance, the cleanest in the industry! This machine is available in three distinct boom configurations, X-Tra, Z-Bar and Telescoping, all utilizing the standard skid steer quick attach plate (SSQA). The G5000 also comes standard with a 2-speed gearbox, 16-ton Comer axles and electric locking differentials. The planetary final drives deliver torque to the ground, accelerating the loader to a top speed of 12.4 mph. An optional hi-speed gearbox adds 2 additional gears for travel speeds up to 21.6 mph. The G5000 is available with an open station or a heated cab with optional AC, both offering an ergonomic and spacious work environment. Like all Giant articulating wheel loaders, the G5000 frame is equipped with an oscillation joint, helping to improve ride quality and limit ground pressure. A few of the available options include tire profiles for various terrains, road lights for safe travel, 35gpm high flow hydraulics and boom suspension. The G5000 has the power and efficiency to comfortably operate in all industries including agriculture, construction, landscaping and snow removal.

GiANT Loaders North America reserves the right to make changes in specification at any time without notice or obligation.

DIMENSIONS

	G5000	G5000 X-Tra	G5000 TELE
A	80.5 in.	80.5 in.	80.5 in.
B	164 in.	163.9 in.	175.4 in.
C	196.9 in.	196.6 in.	209.1 in.
D	27.8 in.	27.8 in.	27.8 in.
E	7.8 in.	7.8 in.	7.8 in.
F	27.6 in.	27.6 in.	27.6 in.
G	63 in.	63 in.	63 in.
H	99.3 in.	99.3 in.	99.3 in.
I	100.5 in.	100.5 in.	100.5 in.
J	72.4 in.	69.8 in.	75 in.
K	100.4 in.	75.6 in.	133.9 in.
L	137.8 in.	112.2 in.	171.3 in.
M	167.3 in.	141.7 in.	200.8 in.
N	45°	45°	41°
O	54°	43°	41°
P	46°	46°	-
Q	29°	29°	29°
R	Ø 41.3 in.	Ø 41.3 in.	Ø 41.3 in.
1A	141.3 in.	141.3 in.	147.2 in.
1B	125.6 in.	125.6 in.	125.6 in.
1C	68.7 in.	68.7 in.	68.7 in.
1D	57.5 in.	57.5 in.	57.5 in.

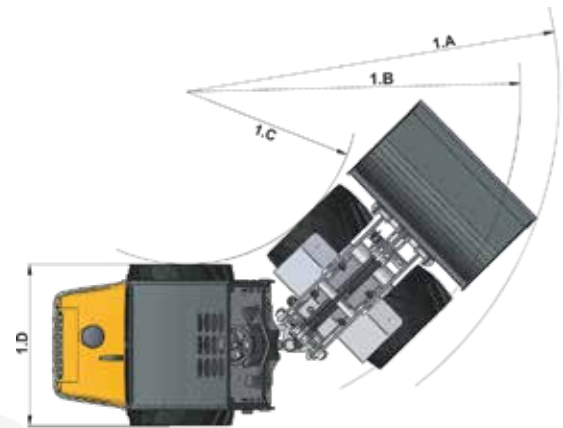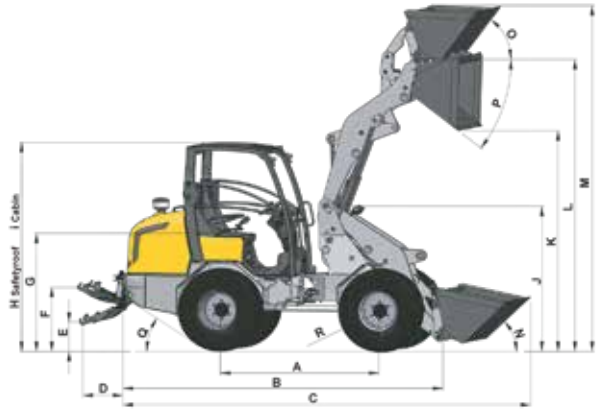

TIPPING LOADS

	G5000	G5000 X-Tra
S	7,360 lbs	9,850 lbs
T	7,079 lbs	8,490 lbs
U	5,512 lbs	6,321 lbs
V	4,383 lbs	5,033 lbs
W	10,048 lbs	10,699 lbs
X	6,991 lbs	7,445 lbs
Y	5,176 lbs	5,512 lbs

G5000 TELE

