

Electric

POPULAR OPTIONS

150A-300A External Fast Charge

Boom Suspension (Ride control)

Opportunity Charging

Cab/Heat

Oil Cooler

Stabilo

Foldable ROPS


14-pin Connector

Heated Air-ride Seat



f

(0)

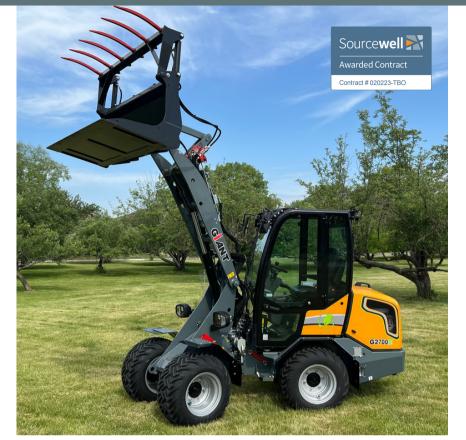

QUICK SPECS G2700E **G2700E X-TRA** Jungheinrich 48V, 520Ah Jungheinrich 48V, 520Ah Battery Drive motor Electric, 7 kW Electric, 7 kW Hydraulic motor Electric, 12 kW Electric, 12 kW Drive system Electric 4WD Limited Slip Electric 4WD Limited Slip Plate style Full size skid (SSL) Full size skid (SSL) 10.6 GPM 10.6 GPM Hydraulic flow Lift capacity 4629 lbs. 4850 lbs. 4938 lbs. 5732 lbs. **Tipping** load 116.6 in. 98 in. Lift height 5709 lbs. 5709 lbs. Machine weight Road speed 11 mph, 3 speed 11 mph, 3 speed On-board charger 60A 60A 4-8 hours 4-8 hours Run time, est. Charge time, est. Overnight, 7-12 hours Overnight, 7-12 hours







360-Degree visibility

Easy entrance to operator station & comfortable ride

Speed & torque with minimal surface damage

Metal construction, but light weight for towing

Regenerative breaking & proven technology

Sourcewell Same

f (O) in 🖸

