

# G1500HD SERIES COMPACT WHEEL LOADER



Sourcewell  
Awarded Contract  
Contract # 020223-TBO

## HIGHLIGHTS

- Pro-Inching
- Extra Constant Flow Pump
- Cab with Heat
- Variety of Tire Options

## G1500HD SERIES QUICK SPECS

|                                | G1500HD                                 | G1500HD X-TRA                           |
|--------------------------------|-----------------------------------------|-----------------------------------------|
| ENGINE                         | KUBOTA, 25 HP                           | KUBOTA, 25 HP                           |
| SERVICE WEIGHT                 | 3,262 LBS                               | 3,362 LBS                               |
| LIFTING HEIGHT                 | 100.8 IN                                | 81.5 IN                                 |
| LIFT CAPACITY<br>(PALLET FORK) | 1,962 LBS                               | 2,679 LBS                               |
| WORKING HYDRAULICS             | 10.3 GPM<br>8.5 GPM - CONSTANT FLOW OPT | 10.3 GPM<br>8.5 GPM - CONSTANT FLOW OPT |
| MAX SPEED                      | 7.5 MPH                                 | 7.5 MPH                                 |
| WIDTH                          | 35-49 IN                                | 35-49 IN                                |

**GIANT**  
BY TOBROCO

COMPACT DESIGN, **BIG PERFORMANCE** | [www.giantloaders.com](http://www.giantloaders.com)  
319.449.3677 | [info@giantloaders.com](mailto:info@giantloaders.com)




\*INFORMATION IS SUBJECT TO CHANGE

# G1500HD SERIES COMPACT WHEEL LOADER



## DIMENSIONS

|          | G1500HD                                | G1500HD X-TRA                          |
|----------|----------------------------------------|----------------------------------------|
| <b>A</b> | 53.9 in                                | 55.9 in                                |
| <b>B</b> | 112.2 in                               | 113.8 in                               |
| <b>C</b> | 142.9 in                               | 143.7 in                               |
| <b>D</b> | 88.6 in (Cabin)                        | 88.6 in (Cabin)                        |
| <b>E</b> | 89.4/91.3 in<br>(canopy/foldable roof) | 89.4/91.3 in<br>(canopy/foldable roof) |
| <b>F</b> | 61.0 in                                | 45.3 in                                |
| <b>G</b> | 72.1 in                                | 53.5 in                                |
| <b>H</b> | 100.8 in                               | 81.5 in                                |
| <b>I</b> | 123.6 in                               | 103.9 in                               |
| <b>J</b> | 41°                                    | 44°                                    |
| <b>K</b> | 52°                                    | 55°                                    |
| <b>L</b> | 44°                                    | 41°                                    |
| <b>M</b> | Ø29.5 in                               | Ø29.5 in                               |
| <b>N</b> | 27°                                    | 27°                                    |
| <b>O</b> | 26.9 in                                | 28.9 in                                |
| <b>P</b> | 27.1 in                                | 27.1 in                                |

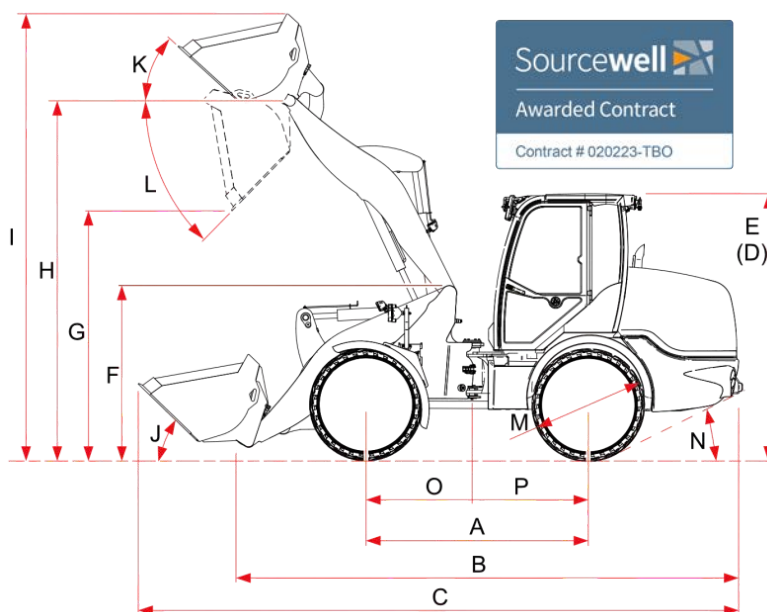

Less tire wear and ground damage



Enhanced operator comfort through articulation and oscillation



Bridging the gap between skid steers and large wheel loaders



Safe and ergonomic operator station with side entry



Higher lift heights and tipping loads compared to service weight